


## C.M.P. TUNDISH TILTING STATION

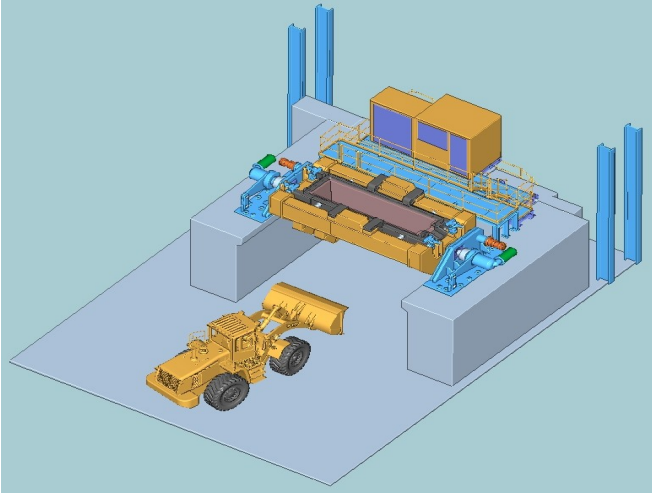

The cleaning of tundish from remaining slag and steel is an usual operation after each tundish working shift, to allow refractory makover and tundish maintenance.

**C.M.P. TUNDISH TILTING STATION** is designed to clear tundish from remaining slag and steel after each tundish working shift in a **fast, systematic and safe way**.

The use of **C.M.P. TUNDISH TILTING STATION** allows the following **advantages**:

- **PROCESS LEAD-TIME REDUCTION**: thanks to a fast and systematic tundish maintenance which allows tundish drawbacks reductions;
- **ACCURACY OF TUNDISH CLEANING**: remaining steel counterledge expelled with the help of hydraulic jacks. - tundish bottom visual inspection allowed;
- **SAFER WORKING CONDITIONS**: remote controlled operation; no manual intervention **with reduction of specific manpower**;



<https://www.youtube.com/watch?v=cAkxRZrGYhU>